

VIDEO

DISMANTLING

CDR

Vehicle positioner for dismantling

Wireless
CONTROL UNIT

360°
CONTINUOUS ROTATION

120°
TILTING ANGLE

20" / 20"
TILTING

- Installation without masonry work
- Fast dismantling
- High safety standards
- Easy to use











Control unit with remote control





Iris-Mec srl - Via Grande 25, 42028 Poviglio (RE) - Italy
+39 0522 48.10.47
commerciale@iris-mec.it
www.iris-mec.com


CDR RC



CDF RC

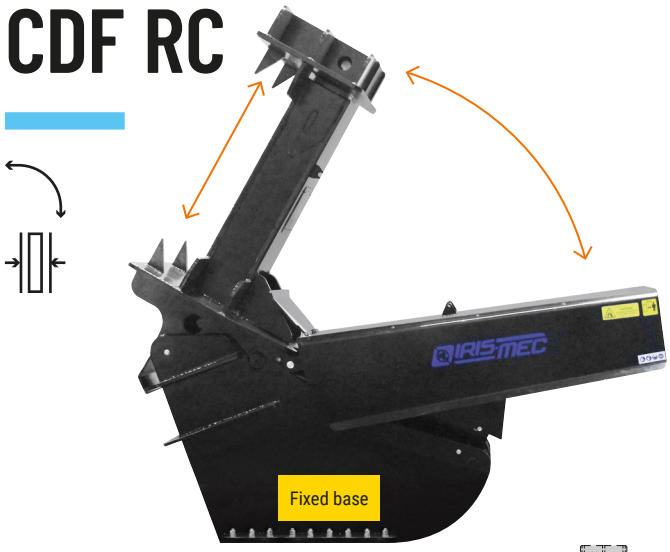

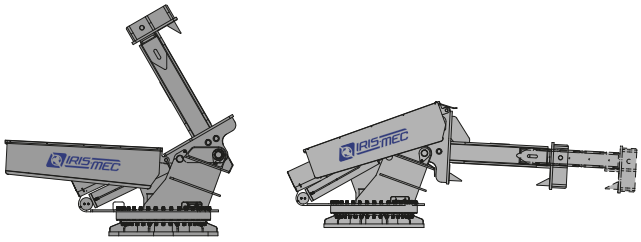


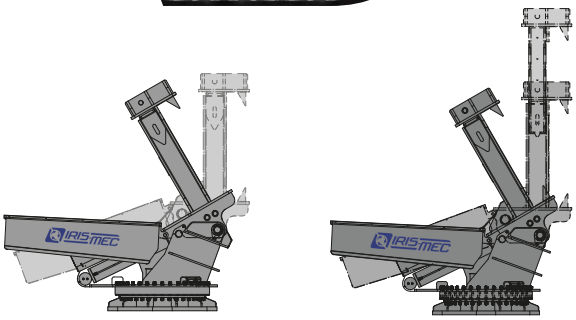


OPTIONAL

- **Kit PLC-R:** In-cab CDR-RC remote control integration kit.
- **Kit PLC-F:** In-cab CDF-RC remote control integration kit.

Kit PLC-R



Kit PLC-F



			CDR-RC 144080100	CDF-RC 144N80100	
	Load capacity	max	3000	3000	
	Rotation time (360 ° continuous)		2	-	
	Clamp opening > closing time		12”	12”	sec
	Tilting angle		120°	120°	
	Tilting time		↑20” - 20”↓	↑20” - 20”↓	sec
	Power supply		15	15	kW
	Voltage		380/400 V - 50 Hz	380/400 V - 50 Hz	
	Rated current		25	25	A
	‘A’ Weighted sound pressure level (LPA)		70	70	dB
	Weight		4500	4000	Kg
	Overall dimensions (transport)		400 x 465 x h.200	400 x 465 x h.200	cm
	Control unit overall dimensions		114 x 147 x h.127	114 x 147 x h.127	cm

Iris-Mec srl - Via Grande 25, 42028 Poviglio (RE) - Italy +39 0522 48.10.47 commerciale@iris-mec.it www.iris-mec.com

10/2023