COMPLETE SOLUTIONS

IBC

Compact depollution system with mobile lift

6 ÷ 8
SUCTIONED FLUIDS

6 ÷ 8
POWERFUL PUMPS

20 / 25 *
VEHICLES / DAY

3 tons
MAX LOAD

- Compact and versatile
- Efficient
- Fast suction
- ATEX certified
- Easy to use
- Low consumption
- Safe, stable and strong
- High lifting speed




IBC

3000 kg




IBC VS

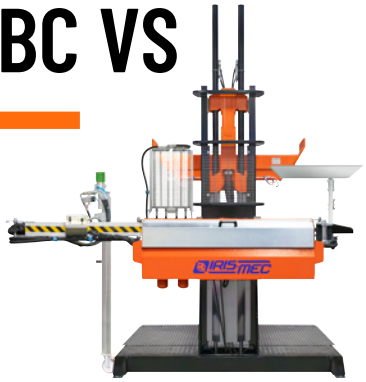


SUCTION DEVICES

Suction hand grips

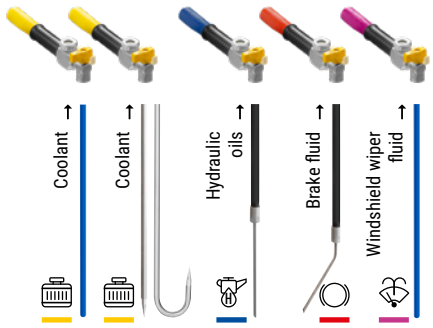



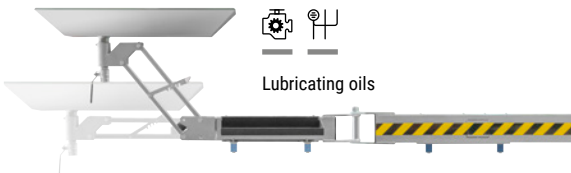







Non-slip platform



Compact base

For use with trolley, more space available



*Value refers to fluid removal only

Iris-Mec srl - Via Grande 25, 42028 Poviglio (RE) - Italy
+39 0522 481047
commerciale@iris-mec.it
www.iris-mec.com





			ISQ Compact 127N84500	ISQ VS Compact 127N84600	
	Compressed air requirement	max	1500	1500	NL / min
	Compressed air inlet pressure		6 ÷ 12	6 ÷ 12	bar
	Fluids outlet pressure		6	6	bar
	Flow rate of fluids**		5 ÷ 15	5 ÷ 15	L/min
	Flow rate of oils**		5 ÷ 10	5 ÷ 10	L/min
	Flow rate of fuels**		10 ÷ 15	10 ÷ 15	L/min
	Pumps	N°	6 ÷ 8	6 ÷ 8	*
	Tank puncher	N°	1 ÷ 2 *	1	
	Fluid storage output lines		6 ÷ 9	7 ÷ 9	*
	Length of the suction pipes		2,5	2,5	m
	'A' Weighted sound pressure level (LPA)		< 70	< 70	dB(A)

* The number may vary depending on the options.

** Purely indicative value that does not consider variables that are difficult to predict and measure, which could affect the performance of the process (such as installation type, distance from tanks, ambient temperature, filter efficiency, etc.)



INCLUDED ✓

Suctioned fluids: Windshield wiper fluid, Brake fluid, Coolant, Hydraulic oils, Lubricating oils, Petrol, Diesel;

OPTIONAL ●

AdBlue® suction line
Extra oil suction line
Fluids weighing system
Extra tank puncher
Fuels quality control module
Drainage tanks with non-slip grating



INCLUDED ✓

Suctioned fluids: Windshield wiper fluid, Brake fluid, Coolant, Hydraulic oils, Lubricating oils, Petrol, Diesel;

Fuels quality control module

Puncher for iron tanks

OPTIONAL ●

AdBlue® suction line
Extra oil suction line
Fluids weighing system
Drainage tanks with non-slip grating

			PMC30 120082500 PMC30 BF 120080700BF	
	Load capacity	max	3000	
Lifting				
	Max lifting height		1980	
	Maximum lifting stroke		1530	
	Lifting time		↑ 34" - 17" ↓	sec
	Hydraulic circuit pressure	max	150	
	Power supply	max	4,5	kW
	Voltage	max	Three-phase - 400 V - 50 Hz	
	Rated current		6,5	A
	'A' Weighted sound pressure level (LPA)		70	dB

Iris-Mec srl - Via Grande 25, 42028 Poviglio (RE) - Italy +39 0522 481047 commerciale@iris-mec.it www.iris-mec.com