

MODULAR SOLUTIONS

IST

Drainage system for end-life-trucks and heavy-vehicles

Special
FOR END-LIFE-TRUCKS AND HEAVY-VEHICLES

5 ÷ 6
POWERFUL PUMPS


Versatile
EXTRA LONG AND STRONG HOSES









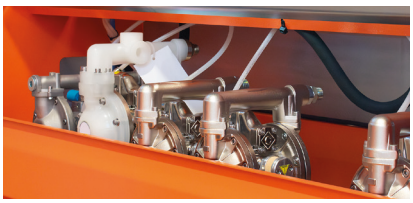



- For end-life-trucks and heavy-vehicles
- Efficient
- Fast suction
- ATEX certified
- Easy to use
- Low consumption

SUCTION DEVICES








Wheeled holding tanks



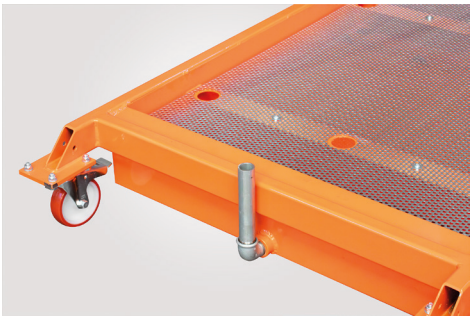

Iris-Mec srl - Via Grande 25, 42028 Poviglio (RE) - Italy
+39 0522 48.10.47
commerciale@iris-mec.it
www.iris-mec.com

IST







Ideal pairing with 2 CRL-IST wheeled holding tanks: (1) For oil (2) For Coolant

INCLUDED

Suctioned fluids: AdBlue®, Coolant, Hydraulic oils, Lubricating oils, Diesel;

OPTIONAL

- Extra windshield wiper fluid suction line
- Extra tank puncher
- Fuels quality control module
- Wheeled holding tanks
- Fluid storage connection kit









			IST 127N80200	
	Compressed air requirement	max	1400	NL / min
	Compressed air inlet pressure		7 ÷ 12	bar
	Fluids outlet pressure		6	bar
	Flow rate of fluids**		10 ÷ 15	L/min
	Flow rate of oils**		5 ÷ 10	L/min
	Flow rate of fuels**		10 ÷ 15	L/min
	Pumps	N°	5 ÷ 6	*
	Tank puncher	N°	1	
	Fluid storage output lines		5 ÷ 7	*
	Length of suction pipes (hose winder)		10 + 2	m
	Length of suction pipes (holding tanks)		2	m
	Length of supply pipes to storage		30	m
	'A' Weighted sound pressure level (LPA)		< 45	dB(A)

* The number may vary depending on the options.

** Purely indicative value that does not consider variables that are difficult to predict and measure, which could affect the performance of the process (such as installation type, distance from tanks, ambient temperature, filter efficiency, etc.)

Iris-Mec srl - Via Grande 25, 42028 Poviglio (RE) - Italy +39 0522 48.10.47 commerciale@iris-mec.it www.iris-mec.com

07/2024