

Safe, stable and strong
Standard lift for ELV's depollution

DEPOLLUTION LIFTS

PM35


Depollution mobile lift

3.5 tons
MAX LOAD

34" / 15"
UP / DOWN

2 m
MAX HEIGHT

- Safe, stable and strong
- High lifting speed
- Specially designed for the depollution process
- High safety standards
- Easy to use
- Easy maintenance

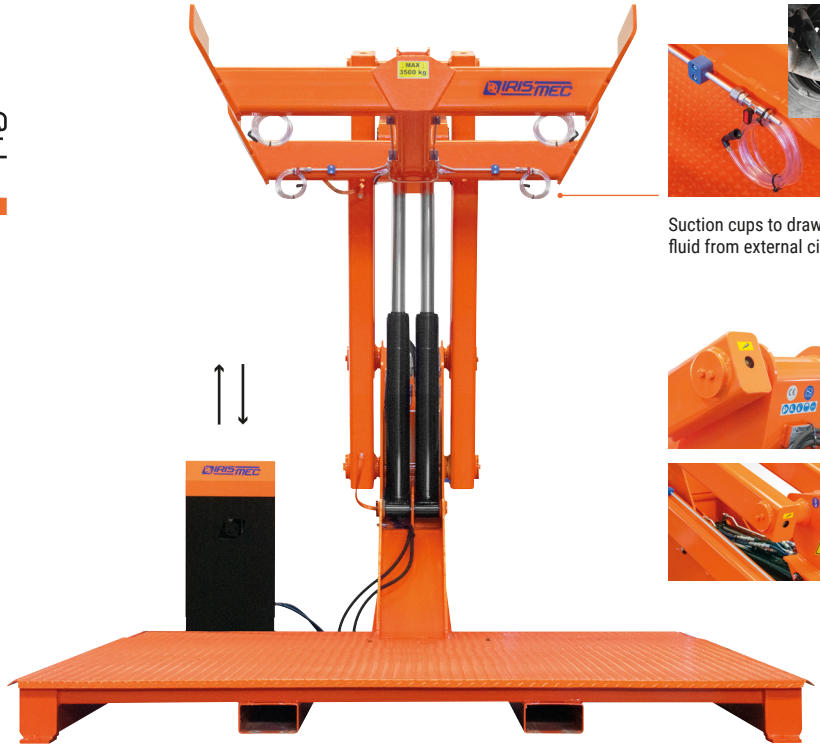


Suction cups to draw the brake fluid from external circuit










VIDEO



Non-slip platform



Compact base

Iris-Mec srl - Via Grande 25, 42028 Poviglio (RE) - Italy
+39 0522 48.10.47
commerciale@iris-mec.it
www.iris-mec.com

PM35



Non-slip platform

PM35 BF




For use with trolley, more space available

Compact base

OPTIONAL

- GR-P: 3 drainage tanks with non-slip grating - 200 x 85 x h 12,5 cm
- GR-4R: 4 drainage tanks with non-slip grating - 150 x 100 x h 12,5 cm
- BND: Tools support armTools support arm
- BSM: Engine disassembly bench

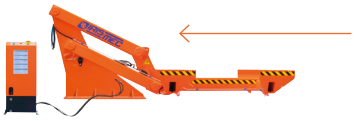






GR-P



GR-4R





			PM35 (120082700) - **PM35 BF** (120082700BF)	
	Load capacity	max	3500	
Lifting				
	Max lifting height		1980	
	Maximum lifting stroke		1530	
	Lifting time		↑34" - 15"↓	sec
	Hydraulic circuit pressure	max	150	
	Power supply	max	3	kW
	Voltage	max	Three-phase - 400 V - 50 Hz	
	Rated current		6,5	A
	'A' Weighted sound pressure level (LPA)		70	dB

Iris-Mec srl - Via Grande 25, 42028 Poviglio (RE) - Italy +39 0522 48.10.47 commerciale@iris-mec.it www.iris-mec.com

03/2024