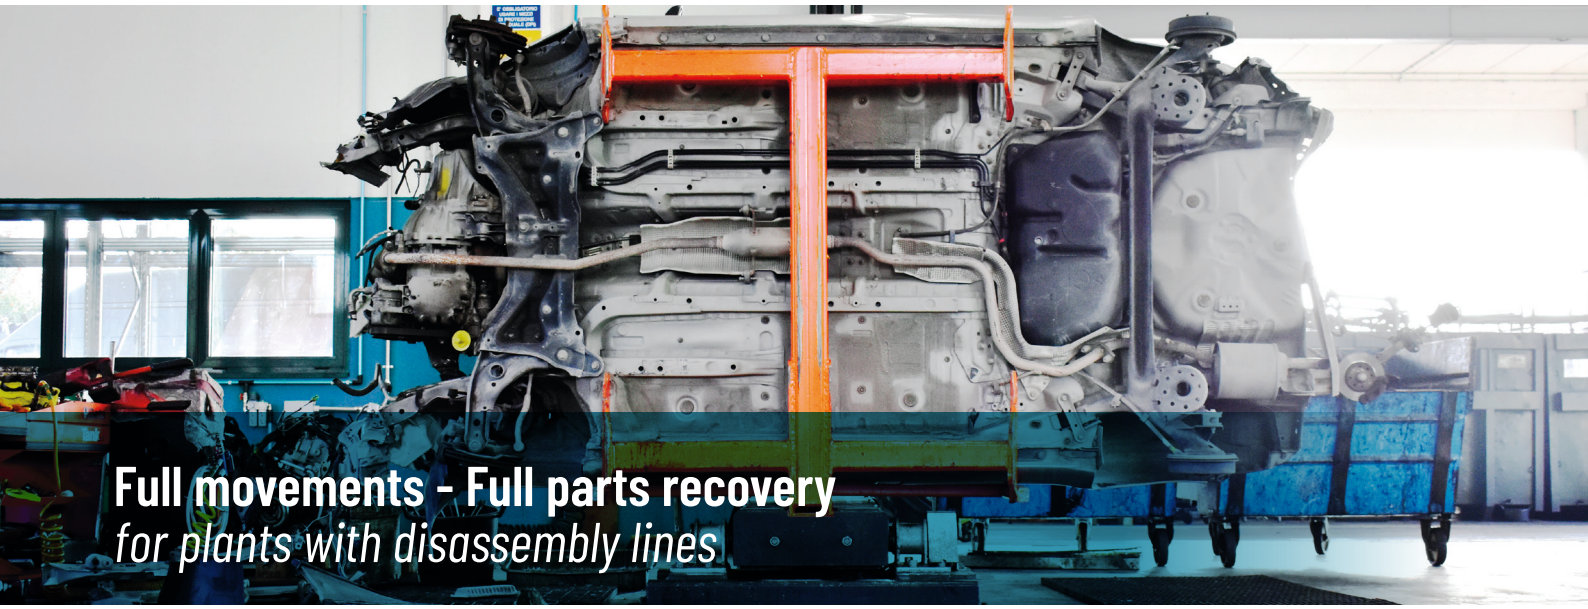


Full movements - Full parts recovery
for plants with disassembly lines

DISMANTLING LIFT

PRT

Tilting lift / lift
for car parts disassembly

3 tons
MAX LOAD

34" / 17"
UP / DOWN


25" / 17"
TILTING

2,3 m
MAX HEIGHT

- Safe, stable and strong
- High lifting speed
- Specially designed for the dismantling process
- Ergonomic
- High safety standards
- Easy to use
- Easy maintenance


VIDEO








Non-slip platform

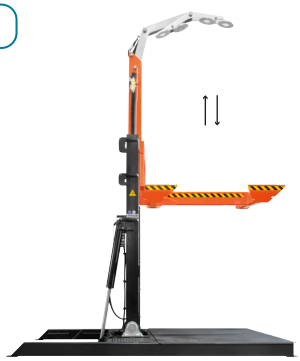

Ergonomic



Compact base

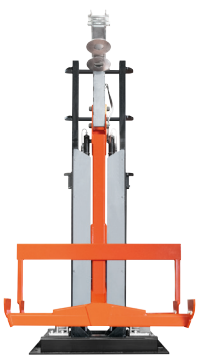


Iris-Mec srl - Via Grande 25, 42028 Poviglio (RE) - Italy
+39 0522 48.10.47
commerciale@iris-mec.it
www.iris-mec.com

PRT



Non-slip platform

PRT BF

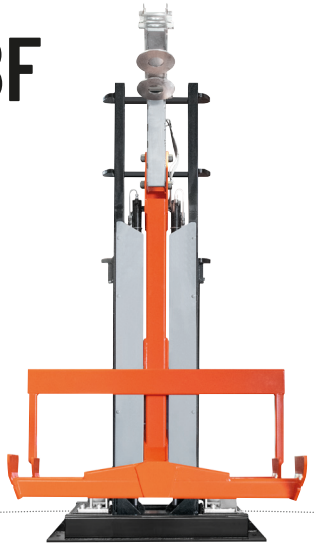


For use with trolley, more space available


Compact base

OPTIONAL

- GR-R: Grill - 5 basins 100 x 150 x h 13 cm
- BND: Tools support arm
- BSM: Engine disassembly bench











			PRT (142080400) - **PRT BF** (142080500BF)	
	Load capacity	max	3000	
Lifting				
	Max lifting height		2035	
	Maximum lifting stroke		1635	
	Lifting time		↑34" - 17"↓	sec
	Hydraulic circuit pressure	max	200	
Tilting				
	Tilting time		↑25" - 17"↓	sec
	Tilting angle		90°	
	Hydraulic circuit pressure	max	160	
	Power supply	max	3	kW
	Voltage	max	Three-phase - 380 V - 50 Hz	
	Rated current		7	A
	'A' Weighted sound pressure level (LPA)		70	dB

Iris-Mec srl - Via Grande 25, 42028 Poviglio (RE) - Italy +39 0522 48.10.47 commerciale@iris-mec.it www.iris-mec.com

03/2024