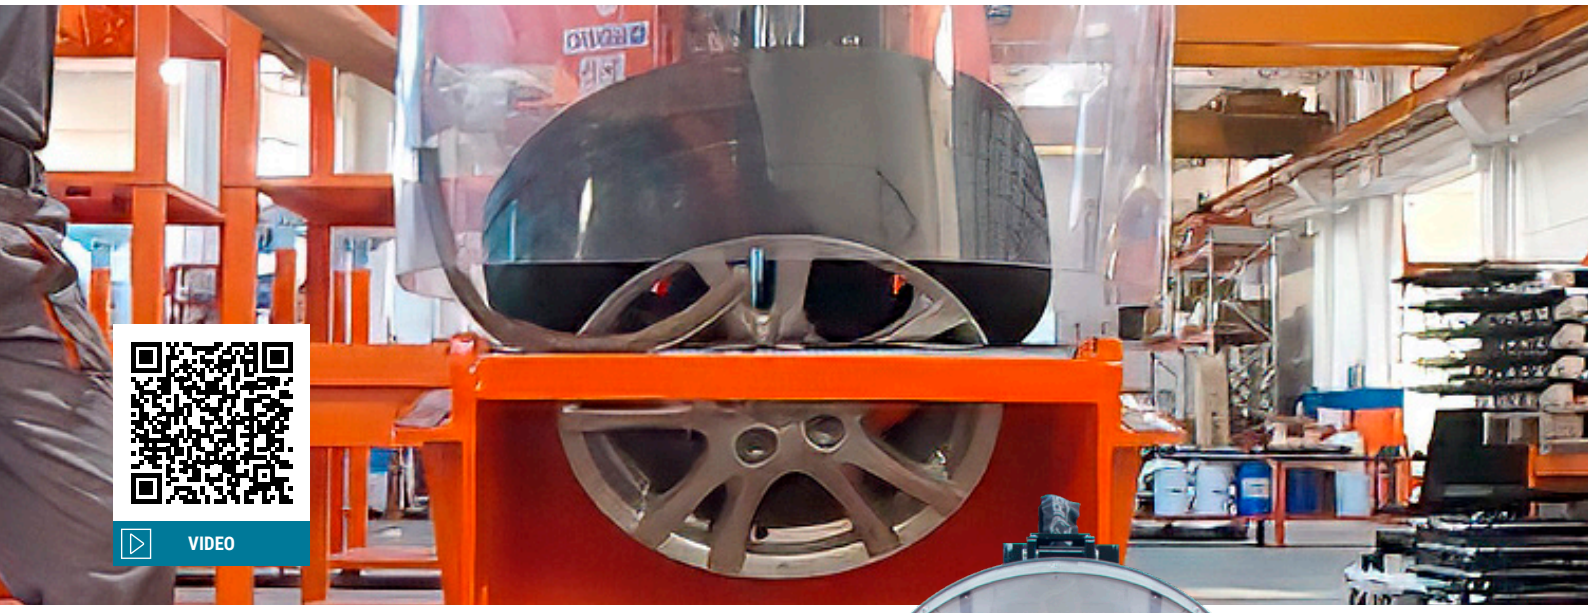


WHEELS

SG03

Manual Tyre / rim separator

Manual
OPERATION

60 ÷ 80
WORK CYCLES / HOUR

Max safety
PROTECTION FROM FRAGMENTS AND DUST

- Efficient
- High safety standards
- Easy to use
- Easy maintenance
- Low consumption











Iris-Mec srl - Via Grande 25, 42028 Poviglio (RE) - Italy
+39 0522 481047
commerciale@iris-mec.it
www.iris-mec.com













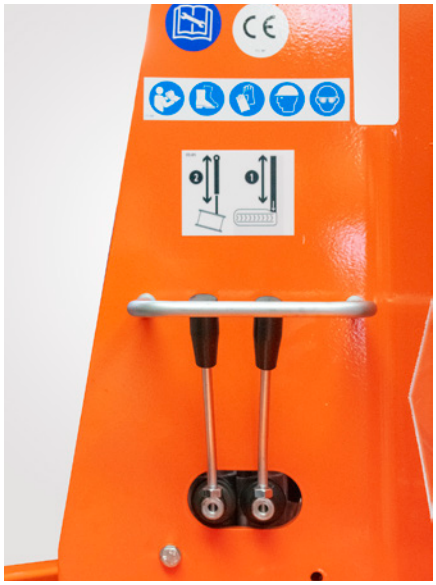

Control panel

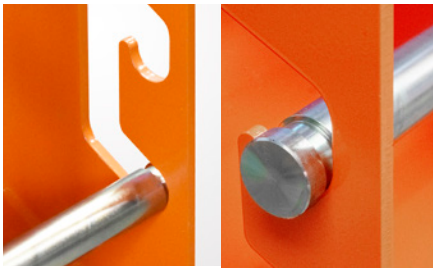

Adjustment stop bar



Work surface with
rim size adjustment bar



Push rod and blade



Emergency stop

			SG03 132N80300	
	Operation		Manual	
	Wheel diameter	max	750	mm
	Wheel thickness	max	250	mm
	Rim size		10” ÷ 18”	
	Rim Type		Alloy / Steel	
	Work cycles		60 ÷ 80	N° / hour
	Power supply		3	kW
	Voltage		Three-phase - 400 V - 50 Hz	
	‘A’ Weighted sound pressure level (LPA)		< 60	dB(A)

Iris-Mec srl - Via Grande 25, 42028 Poviglio (RE) - Italy +39 0522 481047 commerciale@iris-mec.it www.iris-mec.com