

CAR GLASSES

TVP

Glass cutter with control unit, suction unit and tank

Pneumatical
OPERATION

Faster cutting
REMOVAL IN SECONDS

Max safety
PROTECTION FROM FRAGMENTS AND DUST

- Efficient
- High safety standards
- High separation speed
- Easy to use
- Easy maintenance
- Low consumption

VIDEO

Only for windscreens and laminated glass






WITH SUCTION UNIT AND 50 L TANK



Iris-Mec srl - Via Grande 25, 42028 Poviglio (RE) - Italy
+39 0522 48.10.47
commerciale@iris-mec.it
www.iris-mec.com



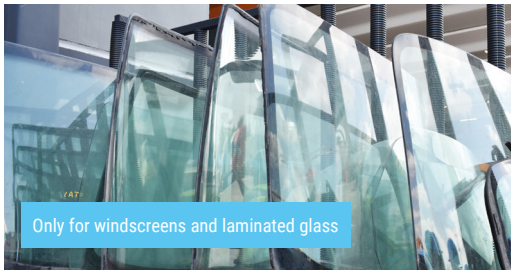








Operating lever



Automatic switch-off when the lever is released

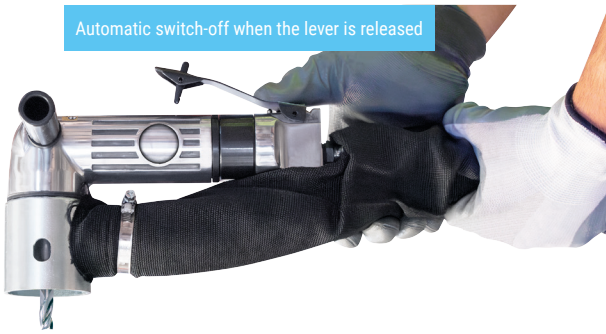

WITH SUCTION UNIT AND 50 L TANK





			TVP 126080100	
	Power supply		0,85	kW
	Voltage		Trifase - 400 V - 50 Hz	
	Rated current		2,5	A
Circuito idraulico				
	Compressed air requirement		6 ÷ 12	bar
	Pneumatic tool air absorption	min	700	Nl/min
	Suction depression	max	160	mbar
	Debris collection bin capacity	max	50	L
	Tubes length (cutter connection)		6	m
	'A' Weighted sound pressure level (LPA)		68	dB

Iris-Mec srl - Via Grande 25, 42028 Poviglio (RE) - Italy +39 0522 48.10.47 commerciale@iris-mec.it www.iris-mec.com

10/2023