



VIDEO



Disassemble engines with ease and recover spare parts effortlessly!

DISMANTLING

# CMM



Compatible with Iris-Mec lifts

Lift table for engine disassembly and spare parts

 **1 ton**  
MAX LOAD

 **12" / 18"**  
UP / DOWN

 **Well-being**  
CORRECT POSTURE AND ERGONOMICS



Optimum manoeuvrability in tight spaces

Optimum manoeuvrability

Quick and effortless disassembly

Ideal as a work surface for dismantling

Efficient

Easy to use

Efficient, remote-controlled lifting system






With wheels for easy handling and movement




Option without wheels for areas with no need of mobility



Option with rechargeable battery or 380 V power supply

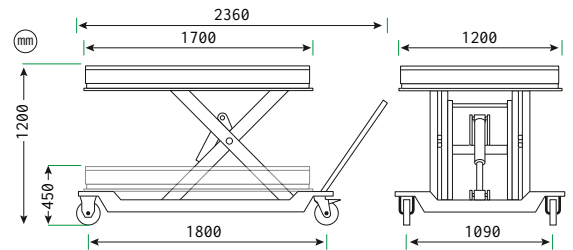

Scratch-resistant surface for engine protection

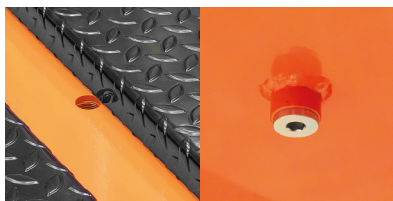

Plan with containment tank and drainage system



		CMM 143N80400	CMM-E 143N80500	
	Payload	Evenly distributed load - max		1000      1000      Kg
	Lifting time	↑ 12" - 18" ↓		↑ 12" - 18" ↓      sec
	Max lifting height	1200		1200      mm
	Max flow	2,4		2,4      l / min
	Max working pressure	190	200	bar
	Power supply	1.1 kW - 380/400V		
	Battery	-	24	V
	Battery charging	-	220	V
	'A' Weighted sound pressure level (LPA)	< 70		< 70      dB
	Weight	450	470	Kg