



DEPOLLUTION LIFTS

PMC30



Depollution mobile lift



3 tons
MAX LOAD



34" / 17"
UP / DOWN



2 m
MAX HEIGHT

Safe, stable and strong

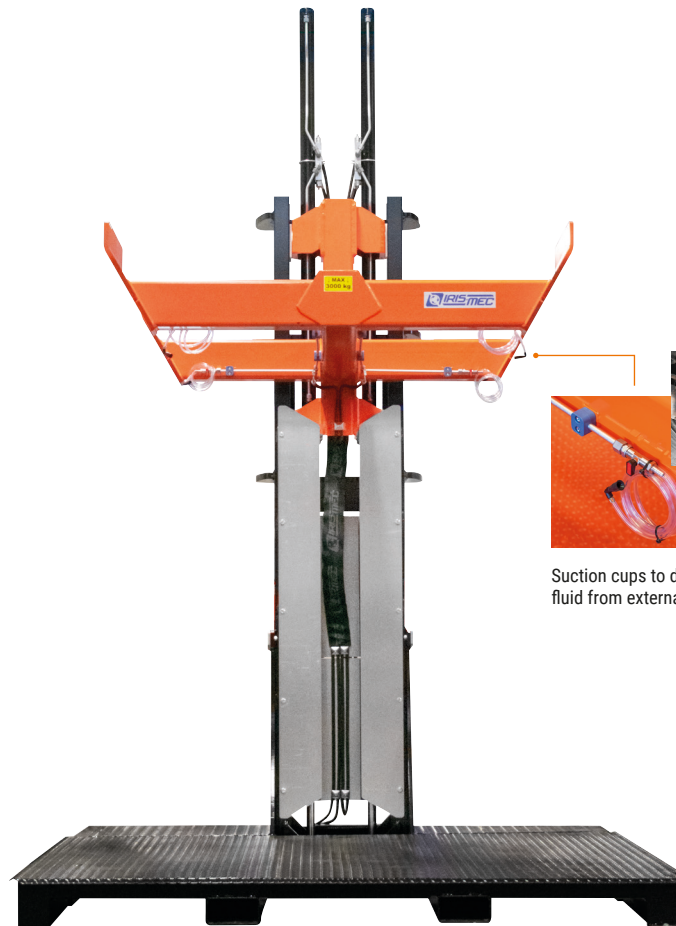
High lifting speed

Specially designed for the depollution process

High safety standards

Easy to use

Easy maintenance



Suction cups to draw the brake fluid from external circuit



 VIDEO



Non-slip platform



Compact base

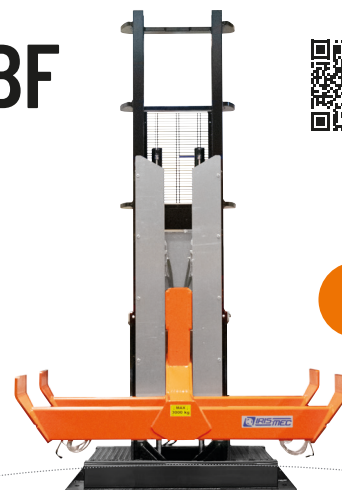
BF

PMC30



Non-slip platform

PMC30 BF




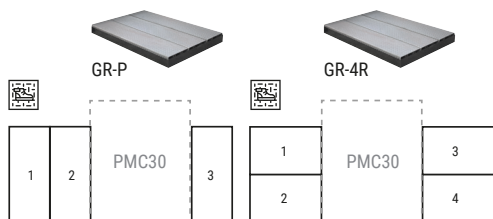
BF

For use with trolley, more space available








Compact base

OPTIONAL

- GR-P: 3 drainage tanks with non-slip grating - 200 x 85 x h 12,5 cm
- GR-4R: 4 drainage tanks with non-slip grating - 150 x 100 x h 12,5 cm
- BND: Tools support arm
- BSM: Engine disassembly bench



PMC30 - 120082500 / PMC30 BF - 120080700BF

	Load capacity	max	3000
Lifting			
	Max lifting height		1980
	Maximum lifting stroke		1530
	Lifting time		↑ 34" - 17" ↓ sec
	Hydraulic circuit pressure	max	150
	Power supply	max	3 kW
	Voltage	max	Trifase - 400 V - 50 Hz
	Rated current		6,5 A
	'A' Weighted sound pressure level (LPA)		70 dB