



WHEELS

# SR



## Tyre / rim separator

 **Automatic / Manual**  
OPERATION

 **60 ÷ 138**  
WORK CYCLES / HOUR

 **Max safety**  
COMPLETELY CLOSED CASE

- Efficient    High safety standards
- High separation speed    Easy to use
- Easy maintenance    Low consumption





Also insertion of fully inflated wheels

Completely closed case - protection from explosions and debris



1/3 volumetric reduction, optimises material delivery to the foundry

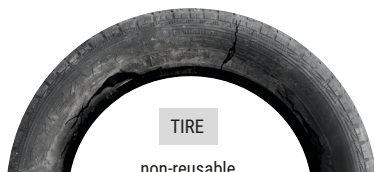

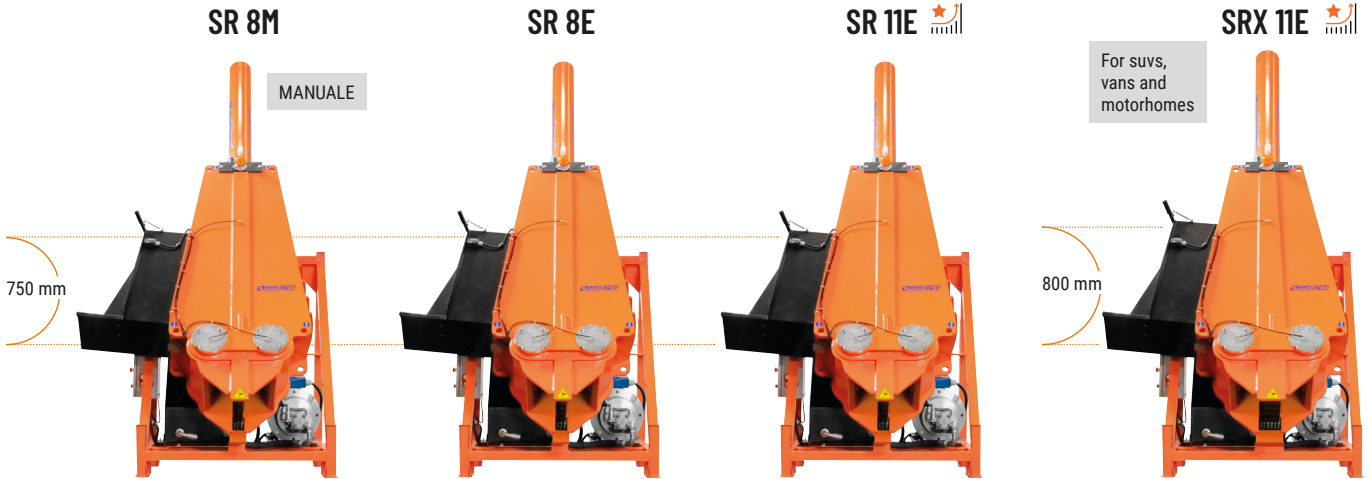

**OPTIONAL** ●  
Automatic lubrication system

**INCLUDED** ✓  
Automatic lubrication system  
**OPTIONAL** ●  
Automated wheel-insertion line (Flipper)



Manual override (SR 8M)

Automatic lubrication system



Automated wheel-insertion line (Flipper)



	SR 8M 130080600	SR 8E 130080100	SR 11E 130080200	SRX 11E 131080100
Operation	Manual	Automatic	Automatic	Automatic
Wheel diameter	max 750	750	750	800 mm
Rim size	12" ÷ 21"	12" ÷ 21"	12" ÷ 21"	12" ÷ 22"
Rim Type	Alloy / Steel	Alloy / Steel	Alloy / Steel	Alloy / Steel
Work cycles	60 ÷ 85	75 ÷ 85	120 ÷ 138	108 ÷ 124
Power supply	7.5	7.5	11	11 kW
Voltage	3-phase - 400 V - 50 Hz	3-phase - 400 V - 50 Hz	3-phase - 400 V - 50 Hz	3-phase - 400 V - 50 Hz
'A' Weighted sound pressure level (LPA)	< 70	< 70	< 70	< 70 dB(A)