



CAR GLASSES

TVP



Only for windscreens and laminated glass



Glass cutter with control unit,
suction unit and tank



Pneumatical
OPERATION



Faster cutting
REMOVAL IN SECONDS



Max safety
PROTECTION FROM FRAGMENTS
AND DUST

Efficient High safety standards


High separation speed Easy to use

Easy maintenance Low consumption


WITH SUCTION UNIT AND 50 L TANK



VIDEO

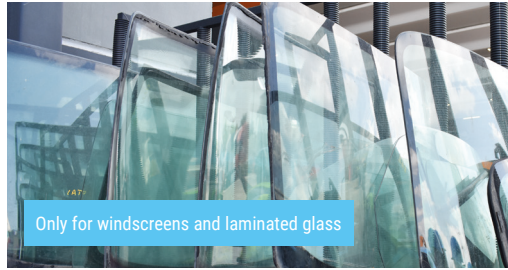


Only for windscreens and laminated glass

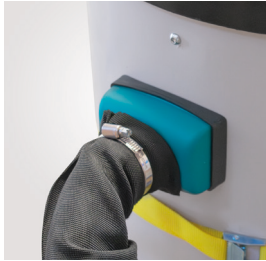

WITH SUCTION UNIT AND 50 L TANK



Operating lever

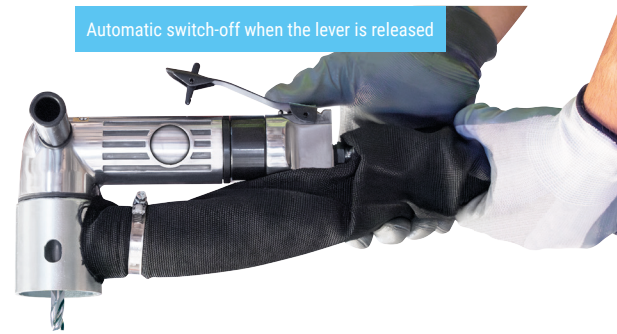

Automatic switch-off when the lever is released



6 meter pipes



		TVP
		126080100
Power supply		0,85 kW
Voltage		Trifase - 400 V - 50 Hz
Rated current		2,5 A
Circuito idraulico		
Compressed air requirement		6 ÷ 12 bar
Pneumatic tool air absorption	min	700 NI/min
Suction depression	max	160 mbar
Debris collection bin capacity	max	50 L
Tubes length (cutter connection)		6 m
'A' Weighted sound pressure level (LPA)		68 dB