



COMPLETE SOLUTIONS


IBC



Compact depollution system with mobile lift

 **6 ÷ 8**
SUCTIONED FLUIDS

 **6 ÷ 8**
POWERFUL PUMPS

 **20 / 25 ***
VEHICLES / DAY

 **3 tons**
MAX LOAD

Compact and versatile Efficient

Fast suction ATEX certified

Easy to use Low consumption


Safe, stable and strong

High lifting speed



SUCTION DEVICES

Suction hand grips

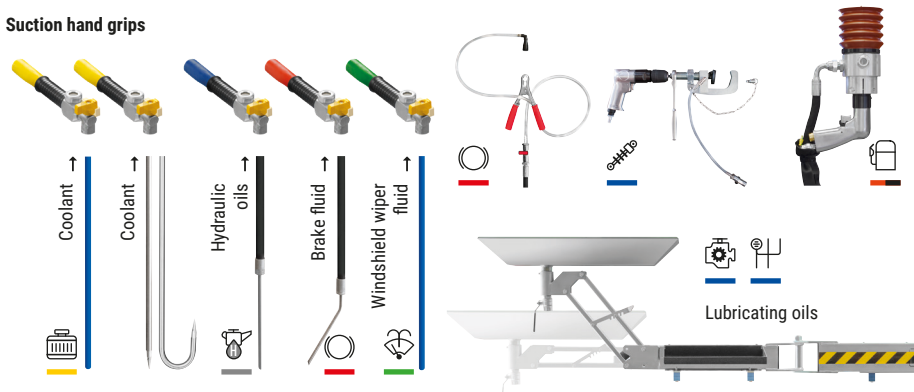


IBC

3000 kg



IBC VS

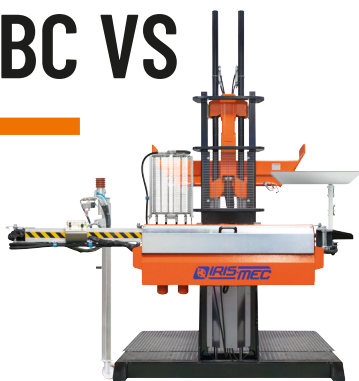

Non-slip platform













Compact base

For use with trolley, more space available



*Value refers to fluid removal only



		ISQ Compact 127087700	ISQ VS Compact 127087900	
	Compressed air requirement	max	1500	1500 NL / min
	Compressed air inlet pressure		6 ÷ 12	6 ÷ 12 bar
	Fluids outlet pressure		6	6 bar
	Flow rate of fluids**		5 ÷ 15	5 ÷ 15 L/min
	Flow rate of oils**		5 ÷ 10	5 ÷ 10 L/min
	Flow rate of fuels**		10 ÷ 15	10 ÷ 15 L/min
	Pumps	N°	6 ÷ 8	6 ÷ 8
	Tank puncher	N°	1 ÷ 2	1
	Fluid storage output lines		6 ÷ 9	7 ÷ 9
	Length of the suction pipes		2,5	2,5 m
	Load capacity	max	3000	3000 Kg
	'A' Weighted sound pressure level (LPA)		< 70	< 70 dB(A)

OPTIONAL

** Purely indicative value that does not consider variables that are difficult to predict and measure, which could affect the performance of the process (such as installation type, distance from tanks, ambient temperature, filter efficiency, etc.)


INCLUDED ✓

Suctioned fluids: Windshield wiper fluid, Brake fluid, Coolant, Hydraulic oils, Lubricating oils, Petrol, Diesel;

OPTIONAL ●

- AdBlue® suction line
- Extra oil suction line
- Fluids weighing system
- Extra tank puncher
- Fuels quality control module
- Drainage tanks with non-slip grating


INCLUDED ✓








Suctioned fluids: Windshield wiper fluid, Brake fluid, Coolant, Hydraulic oils, Lubricating oils, Petrol, Diesel, **Bad fuel**;

Fuels quality control module

Puncher for iron tanks

OPTIONAL ●

- AdBlue® suction line
- Extra oil suction line
- Fluids weighing system
- Drainage tanks with non-slip grating

		PMC30 ¹²⁰⁰⁸²⁵⁰⁰ PMC30 BF ^{120080700BF}	
	Load capacity	max	3000
Lifting			
	Max lifting height		1980
	Maximum lifting stroke		1530
	Lifting time		↑ 34" - 17" ↓ sec
	Hydraulic circuit pressure	max	150
	Power supply	max	4,5 kW
	Voltage	max	Trifase - 400 V - 50 Hz
	Rated current		6,5 A
	'A' Weighted sound pressure level (LPA)		70 dB