




DISMANTLING LIFT

# RBT



Tilting lift for car parts disassembly

 **3 tons**  
MAX LOAD

 **36" / 32"**  
TILTING

 **Well-being**  
CORRECT POSTURE AND ERGONOMICS

 **Safe**  
HIGH SAFETY STANDARDS

Safe, stable and strong

Fast movements

Specially designed for the dismantling process

Ergonomic

High safety standards

Easy to use

Easy maintenance



Non-slip platform

Compact base

Ergonomic




# RBT



Non-slip platform

# RBT BF


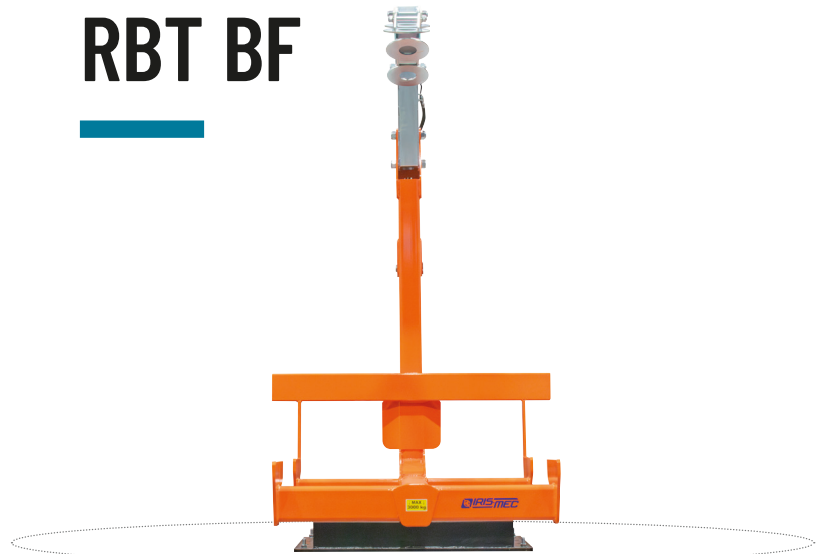


More space available







Compact base

**OPTIONAL**

- GR-R: Grill - 5 basins 100 x 150 x h 13 cm
- BND: Tools support arm
- BSM: Engine disassembly bench



**RBT32 (140080700) - RBT32 BF (140080700BF)**

	Load capacity	max	3000
<b>Tilting</b>			
	Tilting time		↑ 36" - 32" ↓ sec
	Tilting angle		90°
	Hydraulic circuit pressure	max	190
	Power supply	max	4,5 kW
	Voltage	max	Three-phase - 400 V - 50 Hz
	Rated current		11 A
	'A' Weighted sound pressure level (LPA)		70 dB