

VIDEO

WHEELS

SGO2



Manual Tyre / rim separator



Manual
OPERATION



60 ÷ 80
WORK CYCLES / HOUR



Max safety
PROTECTION FROM FRAGMENTS
AND DUST

Efficient

High safety standards

Easy to use

Easy maintenance

Low consumption







Control panel



Adjustment stop bar



Work surface with rim size adjustment bar

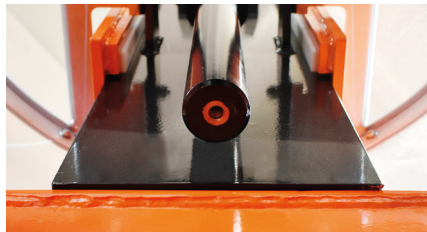

Push rod and blade



Emergency stop

		SG 02 132080200	
	Operation	Manual	
	Wheel diameter	max	750 mm
	Wheel thickness	max	250 mm
	Rim size	10" ÷ 18"	
	Rim Type	Alloy / Steel	
	Work cycles	60 ÷ 80	N° / hour
	Power supply	3 kW	
	Voltage	3-phase - 400 V - 50 Hz	
	'A' Weighted sound pressure level (LPA)	< 60 dB(A)	