




OILS, LIQUIDS, FUELS


IBP



Depollution equipment with integrated weight system

 **Weighing**
OF FLUIDS AND VEHICLE PARTS

 **Traceability**
REAL FEEDBACK ON VEHICLE RETURN

 **5 ÷ 8**
SUCTIONED FLUIDS

Powerful pumps

Fast suction


ATEX certified

Efficient

Easy to use

Low consumption

LIQUIDS AND OILS

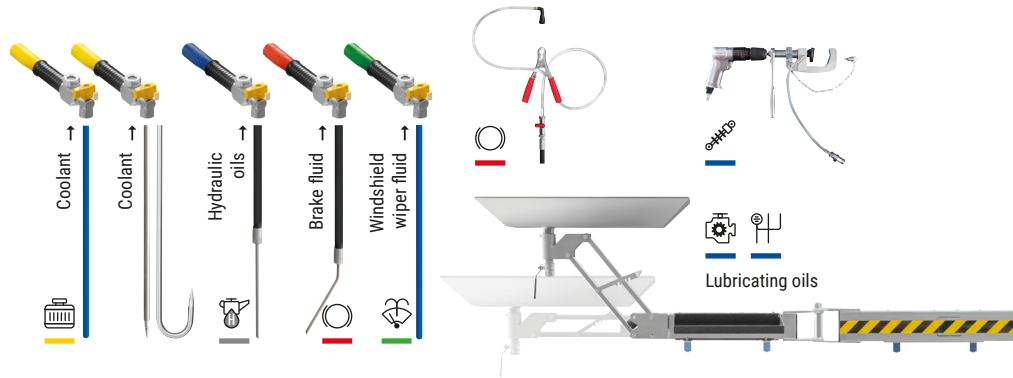

FUEL




Petrol, Diesel

Petrol, Diesel, Bad fuel



VIDEO

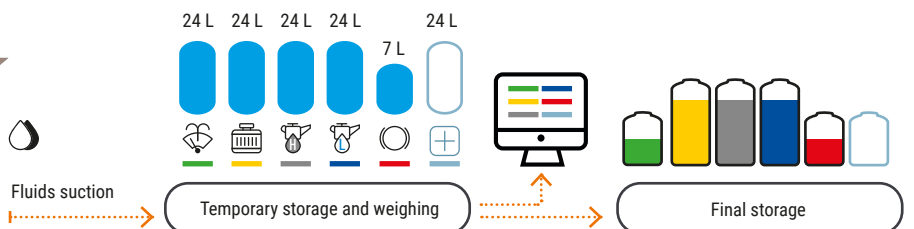












INCLUDED ✓

Suctioned fluids: Windshield wiper fluid, Brake fluid, Coolant, Hydraulic oils, Lubricating oils, Petrol, Diesel;
1 pc 7-litre tank, 4 pcs 24-litre tank
Wireless optical reader

OPTIONAL ●

KIT PESA - 125086700: Weighing kit for AdBlue® or additional oil
KPL-CA - 125086600: Fuels weighing kit
KPL-CO - 29610001: Electronic platform for weighing components



		IBP	+	PFT STD	PFT V	PFT VS	
	Fluids	N°	5 ÷ 6	2	2	2	
	Flow rate of fluids**		5 ÷ 15	-	-	-	L/min
	Flow rate of oils**		5 ÷ 10	-	-	-	L/min
	Flow rate of fuels**		-	10 ÷ 15	10 ÷ 15	10 ÷ 15	L/min
	Pumps	N°	5 ÷ 6	2	2	2	
	Tank puncher	N°	-	2	2	1	
	Compressed air requirement		396	132	132	132	gpm
	Compressed air inlet pressure		6 ÷ 12	6 ÷ 12	6 ÷ 12	6 ÷ 12	bar
	Fluids outlet pressure		6	6	6	6	bar
	Power supply		500	-	-	-	W
	Voltage		230 V AC - 50 ÷ 60 Hz	-	-	-	
	Rated current		1	-	-	-	A
	Storage output lines	N°	5 ÷ 6	2	2	3	
	Length of the suction pipes	max	2,5	3,5	3,5	3,5	m
	Length of supply pipes to storage	max	30	40	40	40	m
	'A' Weighted sound pressure level (LPA)		< 70	< 70	< 70	< 70	dB(A)

OPTIONAL

** Purely indicative value that does not consider variables that are difficult to predict and measure, which could affect the performance of the process (such as installation type, distance from tanks, ambient temperature, filter efficiency, etc.)