


CUTTING

CNT-V

Power supply unit for multifunctional hydraulic shears

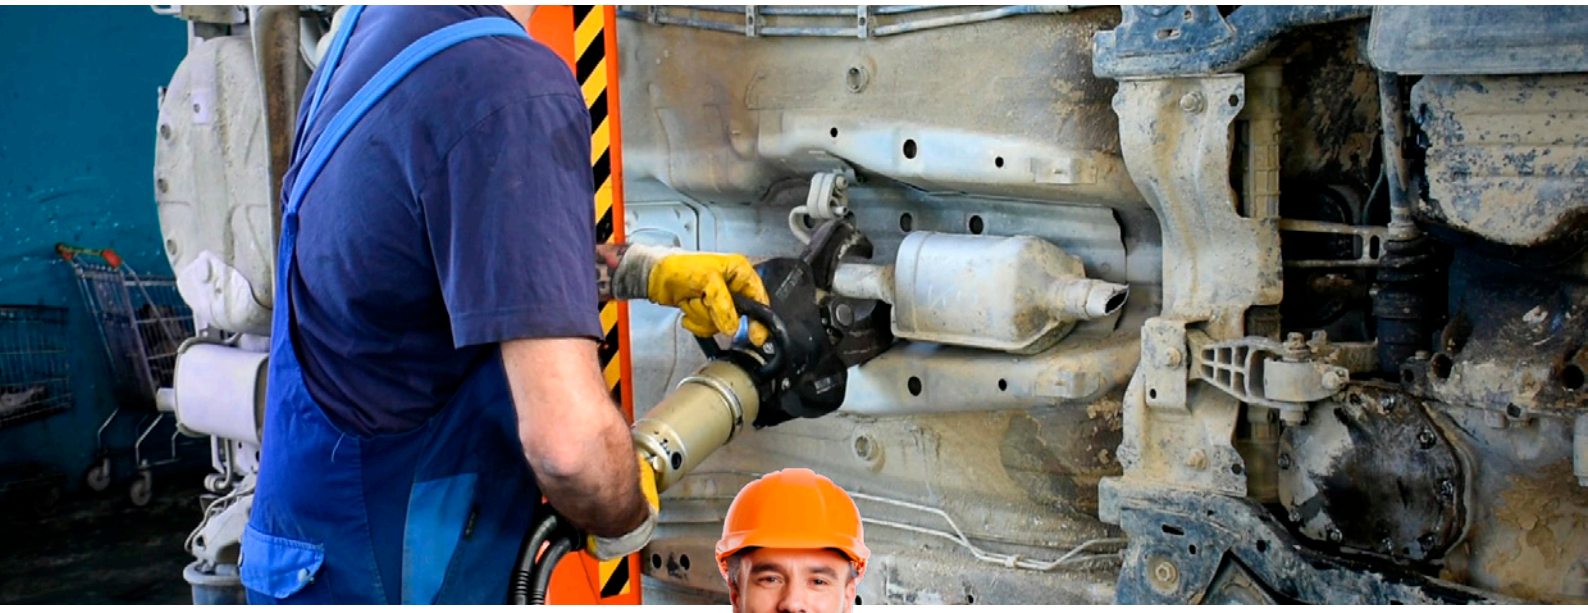

Faster cutting
REMOVAL IN SECONDS

Ergonomic
CORRECT POSTURE AND ERGONOMICS

Efficient
HIGH CUTTING FORCE

- Efficient
- High safety standards
- Easy to use
- Easy maintenance
- Low consumption



Iris-Mec srl - Via Grande 25, 42028 Poviglio (RE) - Italy
+39 0522 481047
commerciale@iris-mec.it
www.iris-mec.com

10/2026

Raised handles for easier equipment handling.





Shear positioned ergonomically for an easy grip.

Removable rear panel for quick access to internal components.



Catalytic converter, exhaust pipes and body parts



HMC050A30



RSX 130

Cutting and removal of cables and wiring harnesses



HMC050A10

		CNT-V 124N80400	
Power supply	max	0,95	kW
Voltage	max	Three-phase - 400 V - 50 Hz	
Rated current		2,2	A
1st stage hydraulic circuit			
Max flow		3,25	l / min
Max working pressure		160	bar
2nd stage hydraulic circuit			
Max flow		0,67	l / min
Max working pressure	Adjustable by the manufacturer	500 ÷ 700	bar
Oil tank capacity		8	L
Tubes length (cutter connection)		6	m
'A' Weighted sound pressure level (LPA)		68	dB
External dimensions		550 x 650 x h. 950	mm







			HMC050A30 32510003	RSX 130 325002	HMC050A10 32510004	
Blade opening	max	170	127	120	mm
Cutting force	max	438	483	441	kN
Weight		10,8	14,1	11,4	Kg

Iris-Mec srl - Via Grande 25, 42028 Poviglio (RE) - Italy +39 0522 481047 commerciale@iris-mec.it www.iris-mec.com